Bridge4U
KVM Solutions

Use a single mouse & keyboard for **All your Computers**

Compatible with:
4KCRAFT ONE I DUO I QUATRO
SCREEN BRIDGE All in one video processor

Take your workspace to the next level

Operate sixteen computers with only one mouse, one keyboard and up to sixteen screens and make your workplace more efficient and ergonomic. Switching between computers is done using configurable key combinations.

The Bridge4U does not process video signals. Each monitor is directly connected to the computer. To add video signal flexibility and get the maximum of the Bridge4U, combine it with a 4KCRAFT Multiview or a ScreenBridge Video Processor.

Up to 16 computers   **Up to 4 Users**

Sixteen computers & Four Users

Up to sixteen computers can be opearted by eight users, each one with one set of keyboard/mouse.
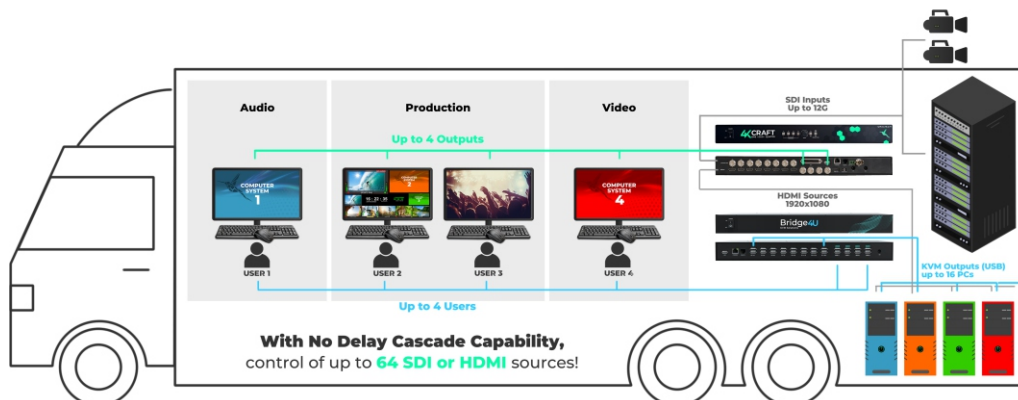
Hardware based KVM

Hardware design based in FPGA. Not software installation required.

Video

The Bridge4U does not process video signals. Each monitor is directly connected to the computer. Combine it with 4KCRAFT Multiview or ScreenBridge video processor to add video signal flexibility.

Hybrid **4KCRAFT** Multiview + **Bridge4U** KVM Solution
Direct and Full Visualization and Control of all your SDI, HDMI and PC Sources

With No Delay Cascade Capability, control of up to **64 SDI or HDMI** sources!

CRALTECH
BROADCAST | MONITORS | MULTIVIEWERS

Specifications are subject to change without notice

ScreenBridge Video Processor + Bridge4U KVM Solution
Powerful 24 In x 24 Out system with 8 Users

New Solution for Control Room, OVBan and Mission Critical Environments

Each user can use a single keyboard & mouse to control multiple computers

PCs Servers

Bridge4U
KVM Solutions

Up 32 KVM Outputs (USB)

SCREEN BRIDGE
All in one video processor

Up to 8 Users

24 x HDMI Inputs 1920x1080

Up 24 HDMI Outputs (Monitors)

USER 1 — USER 8

Applications

Government & Mission critical

**Server Room & Data Center**

**Industry and Control Rooms**

Engineering & Design

Bradcast, Live Stream and e-Sports

Stock and Banking Market

Content Management, Distribution & Live Events

Corporate

Specifications:

KVM Outputs	16 x USB (16 Computers)
KVM Inputs	4 Users (8 USB connectors)
Remote Control	Rj45 Ethernet
Chassis	Aluminium chassis
Dimensions	426,00 x 160,00 x 44,00 mm (1U)
Weight	TBD
Power Supply	12VDC
Warranty	Warranty 2 years

Specifications are subject to change without notice